BANNER BRACKET

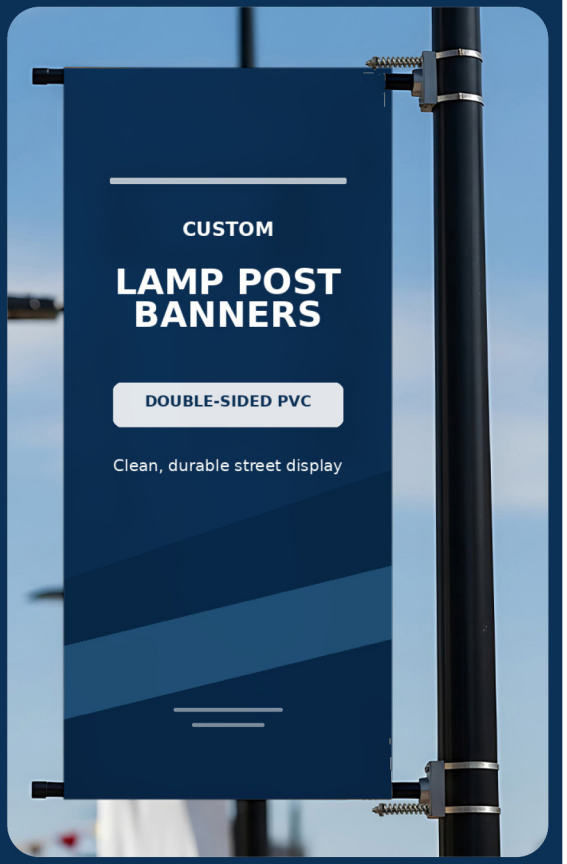

Important info:

- Install the top bracket first, bottom bracket second.
- It is highly recommended that you install the banner at the same time you install the brackets. Installing the brackets prior to installation the banner will likely result in necessary adjustments and incorrect measurements.
- Recommended install height Minimum of 15' from the ground to bottom of banner (for parking lots and street locations).
- Spring position is important. Remember: Top bracket, spring on top. Bottom bracket, spring on bottom.
- Using 2 bands-1 on the spring end, 1 on the other.

ASSEMBLY STEPS

1

Position and attach bracket to pole, using duct tape to temporarily secure bracket while metal bands are positioned. Secure metal bands with screwdriver or banding tool and remove duck tape.

2

Insert fiberglass arm through top pole pocket of banner and insert end of arm with the metal sleeve into the nose of the bracket.

3

Finish with zip tie through grommet.

4

Tighten banding. Clip excess banding and zip tie with snips. Insert fiberglass arm through bottom pole pocket of banner with the metal sleeve inserted into the nose of the bracket. Note: The bottom bracket is not yet attached to pole at this point.

5

Repeat for bottom bracket, ensure spring is on the bottom.